




Ipašības

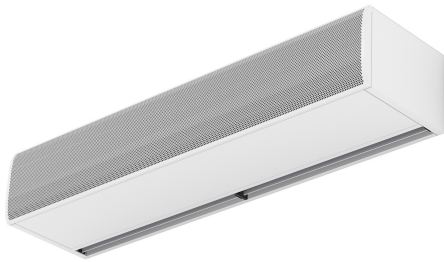

- Speciāli izstrādāts uzstādīšanai auksto noliktavu un saldētavu durvīs.
- Pašbalstoša cinkota tērauda plāksnes korpusa konstrukcija, standartā ar strukturālu epoksīda-poliestera apdari baltā RAL9016 krāsā. Pēc pieprasījuma ir pieejamas arī citas krāsas un nerūsējošais tērauds.
- Liels slīpēts ieplūdes režģis, kas novērš intensīvu apkopi. Ir pieejams arī ar platu mikroperforētu ieplūdes režģi, elegantāks tirdzniecības durvīm, kur apkure nav nepieciešama.
- Anodētas alumīnija izplūdes lāpstiņas, spārna formas, pielāgojasm no 0 līdz 15° no katras puses.
- EC Dubultās ieplūdes centrālās ventilatori, vadāma ar ārējā rotora dzinēju un zema trokšņa līmeni, ar ļoti zema patēriņa efektīviem ventilatoriem.
- "A" tips bez apkures, tikai gaiss.
- Advanced Plug&Play control. Includes: Advanced PRO control with LCD display and integrated thermostat, door contact, 10m and remote control. With integrated functions: door delay (configurable); interface mode; operation, alarm and maintenance warning signals; and multiple digital inputs that modify the air curtain's operation.
- Includes protective varnish for the electronic board and control.
- Optional:
 - Auxiliary temperature sensors that improve air curtain control and increase energy savings.
 - Clever PRO intelligent control (automatic, programmable, ModBus via PLC, timer, etc.) with an additional temperature sensor.
- Includes varnishing on the PCB to protect it from corrosion.

Specifikācijas

50Hz



| Modelis | (m ³ /h) | (m) |
|------------|---------------------|-----|
| KBB 1000 A | 5-7 | |
| KBB 1500 A | 5-7 | |
| KBB 2000 A | 5-7 | |
| KBB 2500 A | 5-7 | |
| KBB 3000 A | 5-7 | |
| KSB 1000 A | 3,5-5 | |
| KSB 1500 A | 3,5-5 | |
| KSB 2000 A | 3,5-5 | |
| KSB 2500 A | 3,5-5 | |
| KSB 3000 A | 3,5-5 | |

60Hz

| Modelis | (m ³ /h) | (m) |
|------------|---------------------|-----|
| KSB 1000 A | 3,5-5 | |
| KSB 1500 A | 3,5-5 | |
| KSB 2000 A | 3,5-5 | |
| KSB 2500 A | 3,5-5 | |
| KSB 3000 A | 3,5-5 | |


Izmeri

View from the top / Vista superior

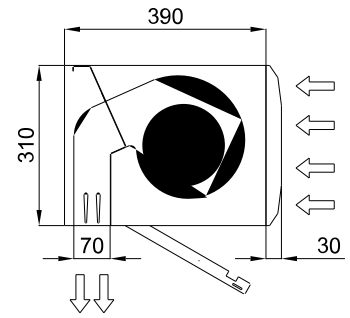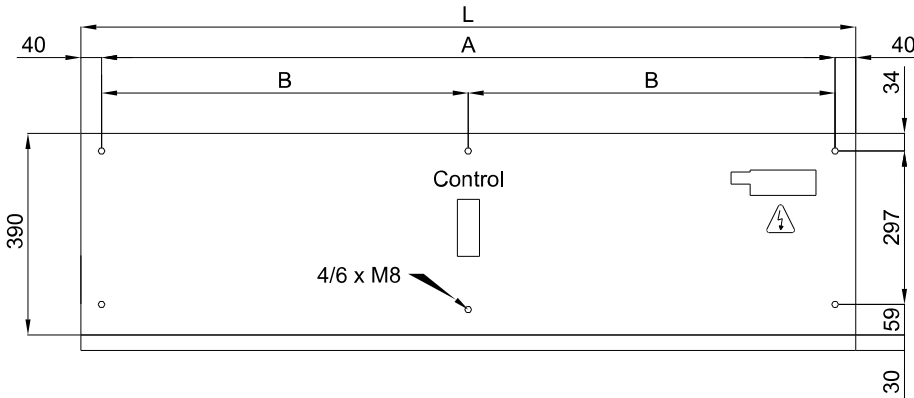

Lateral View / Vista Lateral

View from the bottom / Vista inferior

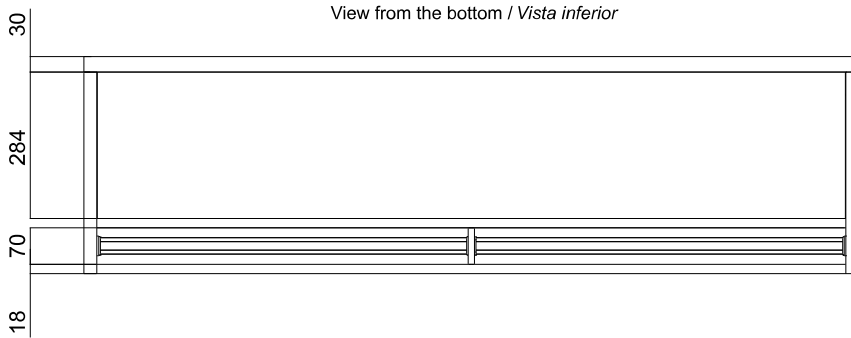

| L | A | B |
|------|------|------|
| 1000 | 920 | - |
| 1500 | 1420 | 710 |
| 2000 | 1920 | 960 |
| 2500 | 2420 | 1210 |
| 3000 | 2920 | 1460 |